



Save More On Free Warranty Extended


Register your product for a **FREE** upgrade
to a 24-Month Warranty:

www.tobenone.net/warranty

THANK YOU!


Thank you for your purchase of the Tobenone Tripl-T-Display Docking Station UDS-015D. Our dock provides the ability to connect three monitors through two HDMI and one VGA interface, SD&Micro SD Card Reader, 3.5mm Audio & Microphone, USB-A 3.0, USB-C PD3.0, RJ45 Gigabit Ethernet to your USB C laptop via one USB C cable.

Ports and connectors

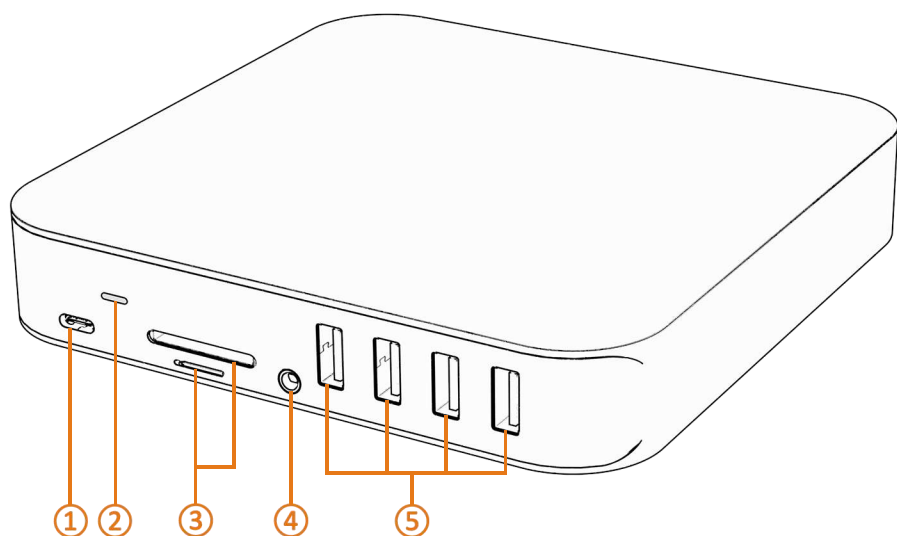

Front:

- ① USB-C: connect to host
- ② LED indicator
- ③ SD&Micro SD Card Reader
Read: 50-104MB/s, Write: 30-80MB/s,
(Data transfer rates are subject to the speed of the memory card
itself and your computer's USB ports.)
- ④ 3.5mm Audio & Microphone
- ⑤ USB-A 3.0 (data+downstream charge): 5Gbps, 5V/0.9A @4.5W

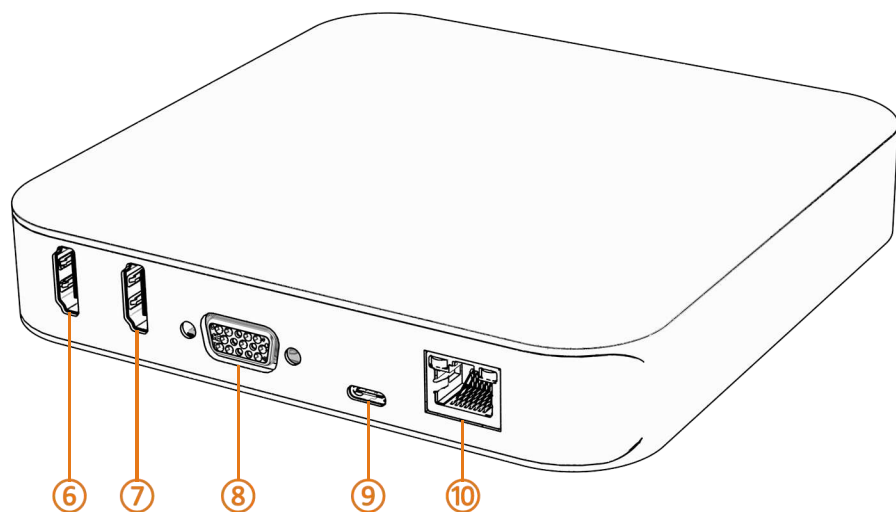

Back:

- ⑥ HDMI 1:
4Kx2K 60Hz / 3840x2160 (work separately while source is DP1.4)
4Kx2K 30Hz / 3840x2160 (work separately while source is DP1.2)
- ⑦ HDMI 2: 4K@30Hz
- ⑧ VGA: Up to 1080P 60Hz.
- ⑨ USB-C PD3.0: Upstream charging the source devices such as Laptop/Notebook, charging limited to 87-96W for safety and affected by different firmware. Support 100W power adapter
- ⑩ RJ45 Gigabit Ethernet: 1000Mbps

For any inquiries, please contact us: support@tobenone.com

USB-C Triple-Display Docking Station Quick Start Guide



Step 1: Connect the Power Cord to the Universal Power Adapter

Step 2: Connect the Universal Power Adapter to PD port (Port ⑨)

Step 3: Connect the dock and your laptop via USB C to USB C cable as provided

Step 4: Connect monitors and VGA via HDMI1 (Port ⑥)/HDMI2 (Port ⑦)/VGA (Port ⑧), cables are not included

Step 5: Install initiate InstantView to display:

1> Firstly, connect the docking station to the laptop via USB cable, and you will see a disk named "INSTANTVIEW"

2> Double click and open the file, according to your system choose the proper application and complete the driver installation within seconds

3> For macOS, the app will require a screen recording permission to capture pixels and send them to your external monitors: Apple Menu-> System Preference-> Security&Privacy->select "Privacy" tab->Scroll to find "Screen Recording" and check "macOS InstantView"

NOTE: The INSTANTVIEW app doesn't store or record any screen content.

4> Click InstantView APP, and it will enable external displays immediately.

Step 6: Attach USB3.0 DEVICES to the front USB3.0 Port (Port ⑤), insert SD card, TF/Micro SD card into SD/TF slot (Port ③)

Step 7: Connect speaker/headphone or microphone to the front audio port (Port ④). Connect the Ethernet cable to RJ45 Ethernet port (Port ⑩)

Troubleshooting:

No Display output via HDMI1

1-Please ensure your laptop's USB-C port supports Power Delivery, DisplayPort, and Data transfer

2-Please check if the connection between the monitors, dock and laptop is tight

3-Please use standard HDMI cable, HDMI to HDMI is recommended

NO audio output from monitor

1-Please make sure your monitor supports audio output function

2-Set the external monitor as default audio output device

Any questions, we are here to help!

Email: support@tobenone.com

WhatsApp: (307) 363-0735

Because the only question we can't fix is the one we don't know