
Belling Lee

L1465 SERIES
MINIATURE COAXIAL CONNECTORS

Widely used in sophisticated communication electronics, these coaxial connectors are small and robust, incorporating an external circlip for maximum strength and resilience.
They employ the famous 'tulip' cable clip together with a removable centre pole to enable soldering.

IMEPEDENCE:	**50 ohms nominal**
BREAKDOWN VOLTAGE (DC):	**>2kV at sea level** **>500V at 30,000m**
INSULATION RESISTANCE:	**≥10^3 megohms**
CONTACT RESISTANCE AND SCREEN CONTINUITY:	**≤5 milliohms**
TEMPERATURE RANGE (AMBIENT):	**-25°C to +70°C**
HUMIDITY:	**A4 (BS 2011)**
CABLE SIZE:	**Inner 1mm** **Overall 4.5mm**
CABLE RETENTION:	**35 N depending on cable**
INSERTION / WITHDRAWAL FORCE:	**20 N maximum**
MATERIALS:	**BODY: Brass, nickel-plated** **INSULANT: RPCS, PCS and CS are methyl pentene polymer. FP and FS are polyethylene** **CENTRE POLE: FP is brass, silver plated RPCS, PCS CS and FS are beryllium copper-silver plated.**

Loading Instructions – L1465 series

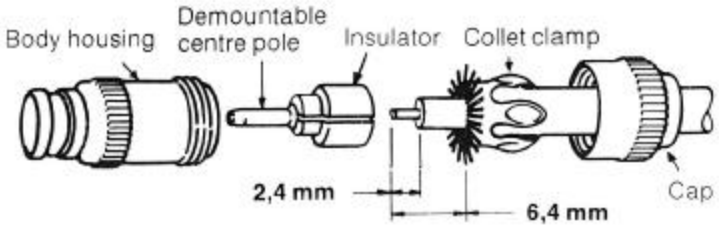

BLP

BLP reserve the right to change without prior notice the information contained within this leaflet


BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com

Belling Lee

L1465 SERIES
MINIATURE COAXIAL CONNECTORS

Free plug






Ordering reference: L1465B/FP

Free socket






Ordering reference: L1465B/FS

Fixed socket




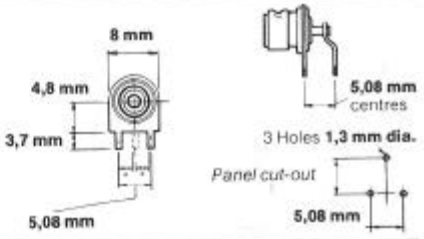

Ordering reference: L1465/RPCS

Fixed socket



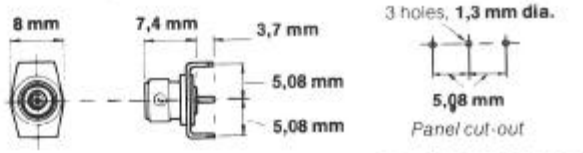


To suit panel thickness up to **2,38 mm**

Ordering reference: L1465/PCS

Fixed socket



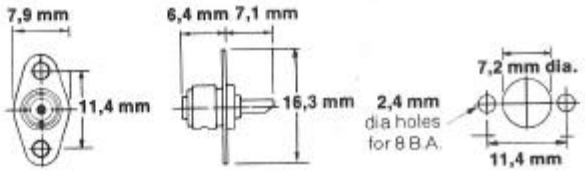

Ordering reference: L1465C/CS

BLP

BLP reserve the right to change without prior notice the information contained within this leaflet

BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com